



Bernhard Steppe becomes spokesman for the Executive Board Management team succeeds Alfred Gaffal

The ground was laid for a new management structure at Wolf GmbH a year ago. Four authorised representatives were appointed to the expanded Executive Board headed by Chairman Alfred Gaffal on 01/02/2010.

Christian Amann (Manufacturing), Gerdewan Jacobs (Technology), Rudolf Meindl (Controlling) and, as future spokesman for the board, Bernhard Steppe (Sales) will take up their positions on 01 April 2011. Alfred Gaffal will become Chairman of the Supervisory Board of Wolf GmbH.

None of the four new members of the Board are newcomers to Wolf as they have all been working at the company for many years. In particular, Rudolf Meindl (Dipl.-Kaufmann), who started at Wolf in 1989, but also Christian Amann (Dipl.-Ing., joined in 1992), Bernhard Steppe (Dipl.-Ing., joined in 1995) and Gerdewan Jacobs (Dipl.-Ing., joined in 2003), all of whom have been 'Wolfers' for many years.



Alfred Gaffal, Bernhard Steppe, Rudolf Meindl, Christian Amann, Gerdewan Jacobs (from left to right)

Hello

Dear Business Partners,

Other than a seven-year break, I have been part of the Wolf family since 1973. Building up the company from its turnover of €3 million then to €290 today with a good return was, and is, for me both an incentive and a pleasure.

Everything we planned after my return in 2002 became reality. The product range, production, sales, service and marketing were successfully expanded and are fit for the future. Financial success provides support, scope for necessary investment and strength to face increasingly intense international competition.



This facilitates the innovation, product and quality offensive, started in 2003, which we have been pursuing consistently and have successfully brought to the market. Wolf has achieved a great deal, it has grown from an appliance manufacturer to the brand for professionals covering every energy saving system.

However, we could not have achieved our goals without your support. I would like to extend my heartfelt gratitude to you for your loyalty, on behalf of myself and our employees. It has spurred us on and encouraged us. I also thank you personally for the successful, trusting, and amicable working partnership over the past years and decades.

It is now time to hand over the running of the company to a younger team. After 30 years managing our business during a fulfilling period in an exciting industry, I am delighted to be able to hand over the reins to existing members of the management team on 01 April 2011.

Mr Amann (Manufacturing), Mr Jacobs (Technology), Mr Meindl (Controlling) and, as future spokesman for the Board, Mr Steppe (Sales) will assume control of operations in accordance with the process initiated over a year ago. This team has our full confidence. We hope you will place your trust in them too, and stay true to Wolf.

As Chairman of the Supervisory Board of Wolf GmbH, I will also remain closely linked to this great company in the future.

This personnel decision sets the course for our future, enabling us to continue on our successful path. This business is on track.

I know that there are many good years ahead for Wolf, because we are part of an industry with a bright future and great opportunities. The faith in our strength and performance combined with your support and partnership allow us to face the future with confidence. Together we will continue to be successful in the coming years!

All the best!

Alfred Gaffal

Chairman of the Management Board

Another raft of new developments on show at the ISH in Frankfurt Wolf continues its product and innovation offensive

System supplier Wolf continues its product and innovation offensive of recent years in 2011. Just in time for the ISH, the company presents new product highlights in heating, air conditioning/air handling, ventilation, solar thermal systems and CHP modules. Under the

motto "Climate protection and energy saving as standard," the company's main focus is on expanding its heat pump range that was successfully introduced last year, with additional output ranges. Other ground-breaking innovations in the areas of heating/solar thermal systems, air conditioning/air handling/ventilation, cylinders and control technology, include the expansion of the test-winning COB oil condensing boiler series, the introduction of smaller CHP units now with seven kW electrical output, the new CFL Comfort flat

ventilation unit, innovations in the BM Solar programming module and SM2 solar module, as well as the launch of the new SLS solar heating module and LS primary store module. Wolf focuses on planning, installation and maintenance, as well as on the efficiency and output ranges of its appliances, and therefore works to achieve end customer satisfaction, in all system areas. So in 2011, too, Wolf partners can look forward to systems that work more simply, safely, and above all quickly. See page 4 for further details.

Contents of this issue:

A German-Russian model for success Opening of the new engineering centre in Yaroslavl	Page 2
Expansion of the global Wolf sales network Increased commitment of Wolf to South America	Page 2
The right ambience matters Indoor pool in Kilchberg on Lake Zurich uses air conditioning/air handling equipment and solar thermal system from Wolf	Page 3
Shopping in a pleasant atmosphere Wolf air conditions "Riverside"	Page 3
New study Ventilation in dwellings	Page 3
Wolf in a new light New look at the ISH 2011	Page 4
New output ranges in 2011 WOLF extends its heat pumps series	Page 6
Fits like a glove Proprietary Wolf sizing program for heat pumps	Page 6
Always one step ahead: High effectiveness of Wolf CSZ gas condensing solar centre	Page 6
Join in and register as an organiser Wolf supports "Solar Week" and "Heat Pump Campaign Week"	Page 7
New consulting and information tool "Wolf Showroom" app	Page 8
Subsidy tip New KfW subsidies for heating system modernisation	Page 8
New sales staff at Wolf	Page 8

The Wolf Comfort range

NEW Comfort large area ventilation unit
Used in schools and offices

NEW Comfort compact ventilation unit
Intelligent appliance design for easy installation and low-maintenance operation

NEW Comfort flat ventilation unit
1000 / 1500 / 2200 m³/h
Heat recovery of up to 95%



A German-Russian model for success

Opening of the new engineering centre in Yaroslavl

At the end of January, a few weeks after a Russian delegation visited the Wolf factory in Mainburg, the German ambassador to the Russian Federation, Professor Ulrich Brandenburg, together with Governor Sergei Vachrukov, his deputy Andrei Yepanechnikov and the Chairman of the Board of Wolf GmbH Mainburg, Alfred Gaffal, opened a joint engineering centre for energy efficiency and climate protection in Yaroslavl. The attendance of prominent political figures is an indication of the significance of this project.

Technical University of Yaroslavl and the partner firm, Energyworld Germany GmbH.

possible through the excellent and unbureaucratic cooperation of all involved. It was unique," says Gaffal, praising the conditions and

our involvement in the construction of this energy saving centre, we support the training of skilled labour, as well as research and development in the Yaroslavl region, continually promoting the development of technical expertise," says Wolf's Managing Director.



The objectives pursued at the engineering centre are technical planning for private and commercial properties in Russia, the development of technical processes and production methods for components of energy saving systems, the expansion and retention of skilled labour and the provision of services for engineering energy saving systems using components from Germany. Other partners of the engineering centre are the

The new engineering centre was set up in record time. Alfred Gaffal signed the related agreements and declarations of intent in Moscow as recently as spring of last year. "The fact that this project was executed in such a short time has only been

high level of cooperation with the partners in Yaroslavl. Together with these partners, Wolf seeks to make a contribution to Russia's energy efficiency and climate protection goals with the new engineering centre. "Through

However, Wolf also wishes to further increase and expand its involvement in the Russian Federation through this new engineering centre. "Wolf energy saving systems are already successfully incorporated into many properties in Russia today," says Alfred Gaffal. So, for example, Wolf systems already provide optimum air handling in the Kremlin in Moscow, the Olympic Village in Sotschi, Sheremetyevo Airport, Ekatarinenburg Hospital, the Moscow Hilton, and even at the private villa of Prime Minister Vladimir Putin in St. Petersburg. Through the transfer of technology, Wolf also wishes to provide greater support for the future manufacture of equipment, systems and components in Russia. An initial

example of this is already up and running: the licensed production of Wolf industrial/commercial boilers with up to 58 MW in Sofonovo. At the Russian factory, 220 employees currently work under full capacity in a two-shift operation and will produce and install over 250 industrial/commercial boiler systems during 2011. "The next step will be the production of CHP modules for the Russian market here in Yaroslavl, with engines from Yaroslavl Motor Works which are converted to gas operation and equipped with a Wolf control unit and hydraulic technology," explains Alfred Gaffal. "Through these joint projects, we contribute to energy saving and climate protection in the Russian Federation and in Europe, and create jobs here in Russia and at home in Germany. It's a model for success," adds Gaffal.

Expansion of the global Wolf sales network

Increased commitment of Wolf to South America

Wolf has just acquired two new sales partners in South America.

The new partner in Chile is Farenhouse. This young and innovative company was founded

by four engineers in 2008 and has focused since then on the planning, delivery and installation of solar

thermal systems and renewables. Managing Director Benjamin Millas is also chairman of the Chilean solar

association. Farenhouse has already successfully carried out several projects involving Wolf F3-1 flat-plate collectors. The company is based in Santiago, in the centre of the country. Chile extends 2500 miles from north to south, with an average width of 125 miles. This Pacific nation of 16 million inhabitants includes virtually every climatic zone. Of particular interest to Wolf is the fact, that the Chilean economy has been growing annually at an average of 5 percent for 20 years. There is also an attractive subsidy programme for promoting solar thermal systems.

In Brazil, Wolf will in future be working with Krieger. Krieger is the third largest supplier of air conditioning/air handling appliances and ventilation ducts in Brazil. The company is based in Blumenau in the south of Brazil. It is run by ethnic Germans and so has a rather European corporate culture. For Wolf, Brazil is a very interesting South American market, as product quality and the "Made in Germany" label are highly valued there. A significant increase in orders is expected, above all because of the imminent soccer World Cup in 2014 and the Olympic Games in Rio de Janeiro in 2016. To meet future expectations, Krieger has invested heavily in the partnership with Wolf from the very start. In technology and sales, two staff work exclusively with Wolf. In addition, Krieger has seriously scaled back production of its own air conditioning/air handling equipment in order to focus on Wolf.



Krieger visits Wolf Mainburg (from left to right) Alessandro Dimon (Sales), Dimitri Vitorino (Director for Product Management), Frank Stocker (Head of Wolf Export), Daniel Alfa (Consultant) and Josef Köglmeier (Wolf Export Manager)

The right ambience matters

Kilchberg indoor pool on Lake Zurich uses air conditioning/air handling equipment and a solar thermal system from Wolf

The Municipality of Kilchberg lies on the western shore of Lake Zurich in the Canton of Zurich in Switzerland. Since 1972, Kilchberg has had its own indoor pool, a

fabric of the building suffers if the extraction of humidity is not controlled correctly. The Wolf KG-Top is an extremely efficient, easy to maintain and hygienic air

pools. In contrast to most buildings, indoor pools create a high and consistent level of water evaporation. The appliances are designed to reduce and regulate the humidity, in order to prevent long term building damage.

In the indoor pool at Kilchberg, a total of 11 KG-Top appliances with flow rates between 2200 and 25,000 m³/h and heating output between 3 and 67 kW were installed. Overall, just under 70,000 m³/h can be exchanged.

The air handling appliances are optimally supplemented by a solar thermal system from Wolf. The system, including 70 x TopSon F3-1 high performance flat-plate collectors covering a total surface area of 140 m², generates a yield of 70,000 kWh annually. This corresponds roughly to a saving of 7000 litres of fuel oil per year.

handling system. On the basis of this series of appliances, Wolf offers models that are specially designed for the dehumidification of swimming



modern steel construction with glazed sides. Last year, in 2010, the indoor pool was extensively renovated. Now KG-Top appliances and a solar thermal system from Wolf ensure the perfect temperature for swimming and relaxation.

The right level of humidity is a must for a healthy ambience. Even the



Shopping in a pleasant atmosphere

Wolf air conditions "Riverside"

Inhabitants of Vienna's 23rd district now have access to over 15,000 square metres of shopping mall. In September 2010, the new Riverside Shopping Centre was opened in the new district of Liesing. This shopping centre was built on the grounds of the former Liesinger Brewery and provides local shopping opportunities and a new source of employment, and thanks to its exciting architecture, a new landmark in Liesinger Platz to replace the brewery tower. With more than 50 specialist stores and a food supermarket, Riverside meets almost all shopping needs at the highest standard.



Air handling and ventilation units from Wolf ensure the ideal temperature and a pleasant shopping experience. As in many other shopping centres throughout Austria (including Plus City Linz Pasching, SCS Vösendorf, Leoville, SC UNO Leonding, Rosenarkade Tulln, Rosenarkade Klagenfurt and many more), the tried and tested Wolf KG-TOP series is used in Vienna's Riverside. The fact that system installer SLA GmbH Mautern and Wolf Klima- und Heiztechnik

GmbH are already a highly experienced, well-established team in setting up ventilation and air handling systems in large shopping centres is a real benefit to the system operator. In conjunction with the building services engineers EVU-Ingenieurbüro, a system was designed which meets the latest and most energy efficient standards. The system output speaks for itself: 310,000 m³/h total air volume, 1700 kW heat recovery, 1330 kW heating output and 1360 kW cooling capacity.

New study

Ventilation in dwellings


The Fraunhofer Institute for Building Physics has published a far-reaching study on ventilation in dwellings. Result: Window-opening behaviour depends primarily on different parameters such as the temperature outside, time of day, season, size of dwelling and number of people in the residential unit. Scientists differentiate between those that vent frequently, an average amount or infrequently. However, mechanical ventilation systems exert the greatest influence over ventilation. A comparison of homes with and without ventilation systems shows that ventilation habits tend to be the same, but residential units with ventilation systems are vented at a much lower rate. This study has shown that the average time for which windows are opened in homes with no ventilation systems ranges between 0.62 h/h and 0.07 h/h, while

the average time for which windows are opened in dwellings with a ventilation system ranges between

just 0.39 h/h and 0.01 h/h. The differences in the average times for which windows are opened in homes

with and without a ventilation system during the heating season is particularly significant. This has a

considerable influence on heating energy consumption. Ventilation heat losses become increasingly dominant as the thermal insulation of the building shell improves. They are subject to the insulation of the building and the amount of time windows are opened. Residents, therefore, have a significant influence on the heating energy consumption of a building through their window-opening behaviour, according to the scientists. Wolf's CWL Comfort domestic ventilation system with heat recovery provides a perfect solution. This ventilation system, designed for detached and two-family houses, apartment blocks and offices, extracts stale air and uses a cross-counter-current heat exchanger to channel heated, fresh, filtered and pollen-free air into the living space. This enables up to 95% of latent heat to be recovered.

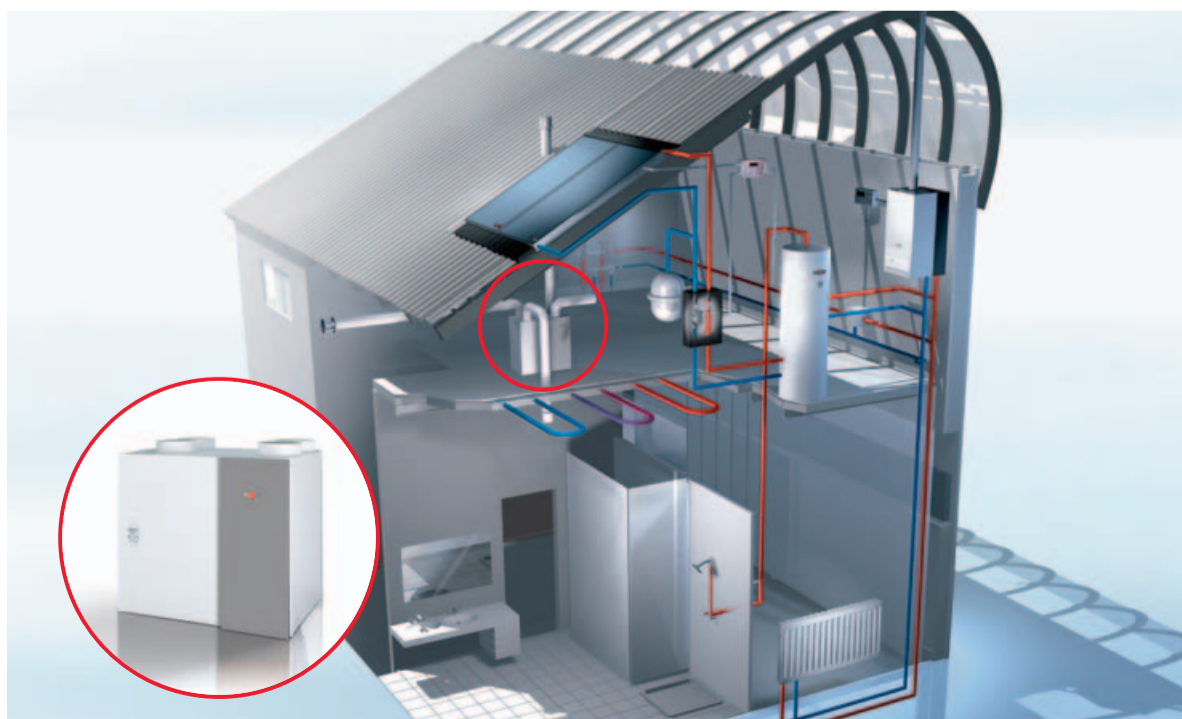

Wolf in a new light

New look at the ISH 2011

Our industry meets for the ISH 2011 in Frankfurt from 15 – 19 March. Over 2300 exhibitors and more than 210,000 visitors are expected. This year, Wolf will welcome its customers and trade partners on two brand-new stands. On a total of over 1400m², the latest products and trends from the heating, air conditioning/air handling, ventilation, solar thermal and CHP

sectors will be presented. You can find the new heating stand (850m² + 150m² on two floors) in Hall 8, Stand F 64. Here, everything is based around oil condensing, gas, biomass, solar thermal, etc. Under the Wolf exhibition motto "Climate protection and energy saving as standard", the main focus is on the expansion of the new heat pump series with additional output ranges

for models BWL-1 (8 – 14 kW) and BW 1 (6 – 16 kW). Wolf is also present with its new look at the ISH Aircontec in the new Hall 11 (Stand B11). Here, you will find everything relating to air conditioning/air handling, cooling and ventilation technology on 360 m² + 100 m² on two floors.

Hall 8



Expansion of the COB series

The Wolf portfolio also focuses on the test winner Stiftung-Warentest (German consumer association), the CGS gas condensing centre and the COB oil condensing boiler. In future, the test-winning oil condensing boiler will be available as COB-15 (up to 15kW), COB-20 (up to 20kW), COB-29 (up to 29kW) and COB-40 (up to 40 kW). The COB series therefore now covers the output required for buildings with a lower heat demand.

1

2 Our ventilation systems are always ahead: The new Comfort flat ventilation unit completes the ventilation range.

In ventilation technology, Wolf extends its comprehensive product and service portfolio with the Comfort flat ventilation unit (CFL), an extremely flat ceiling unit. The air handling unit is available in two versions. The CFL-WRG is a combined ventilation unit with highly efficient heat recovery. The appliance has a countercurrent heat exchanger with around 90 percent efficiency, as well as supply air and extract air fans that are equipped with highly efficient EC motors. The control unit is fitted at the side. The appliance is also equipped with a remote control. The CFL is also available as a pure supply air unit, the CFL-EC-ZUL and as a pure extract air unit, the CFL-EC-ABL. All versions of the Comfort flat ventilation unit are available in the three sizes CFL-10, -15 and -22 (1000, 1500 and 2200m³/h). In addition to their output, they offer easy installation, good accessibility for cleaning and maintenance, and a wide range of accessories.

As well as the new CFL, Wolf also banks on the CKL (Comfort compact ventilation unit) and CGL (Comfort large area ventilation unit) launched last year. The Comfort compact ventilation unit is particularly suitable for controlled ventilation in modern properties such as schools, offices and administration buildings. This new series of ventilation units combines the latest high efficiency ventilation technology with rapid, straight-forward commissioning. The CKL units provide "fresh" air in adequate amounts using demand-dependent control (subject to CO₂ levels) whilst simultaneously saving energy (pursuant to EnEV 2009). In addition, their easy and hygienic maintenance makes the units VDI 6022-compliant.



Function and aesthetics – not a contradiction The Wolf energy roof

Wolf presents the Wolf energy roof. The system combines photovoltaics and solar thermal technology in a visually attractive package. This new development centres around solar collectors that are similar to a typical photovoltaic module in size, thickness and colour. In addition, the Wolf energy roof includes "dummy" modules that look like fully functional modules, but can be cut in situ to frame skylights or pipework and to fill gaps in the surfaces. Solar thermal technology and photovoltaics can

therefore be combined harmoniously and integrate roof outlets and



3

windows into the continuous roof surface. Another new development in the area of solar thermal systems is the roof integration set. The multi-row module is suitable for folding, tiled and slate roofs with a roof slope of 20 to 60 degrees. The maximum aperture area is 60m². The installation set for collectors F3-1 and CFK-1.

NEW – CHP units 7



4

In addition to oil condensing technology, there are also CHP modules with a lower output range. Here, Wolf presents a CHP units with 7kW electrical and 18kW thermal output. The overall efficiency of the system is 86%, which means that 86% of the primary energy used is converted into electricity and heat. The sound-optimised compact enclosure measuring 814x1159x1424mm (WxHxD) includes an integrated control panel with control and monitoring display.



6


New efficiency class

Wolf expands its heat pump series. In future, BWS-1 ground source heat pumps will be offered in output ranges between 6 and 16kW, and BWL-1 air source heat pumps in output ranges from 8 – 14kW. All appliances are distinguished by highest efficiency, low noise level and ease of installation. Also new on the scene, is the BKM cooling module for passive cooling in conjunction with the BWS-1 ground source heat pump. The



cooling module uses the low temperatures of the ground in summer and so represents an extremely cost-effective and environmentally responsible method of cooling without the use

Gas condensing

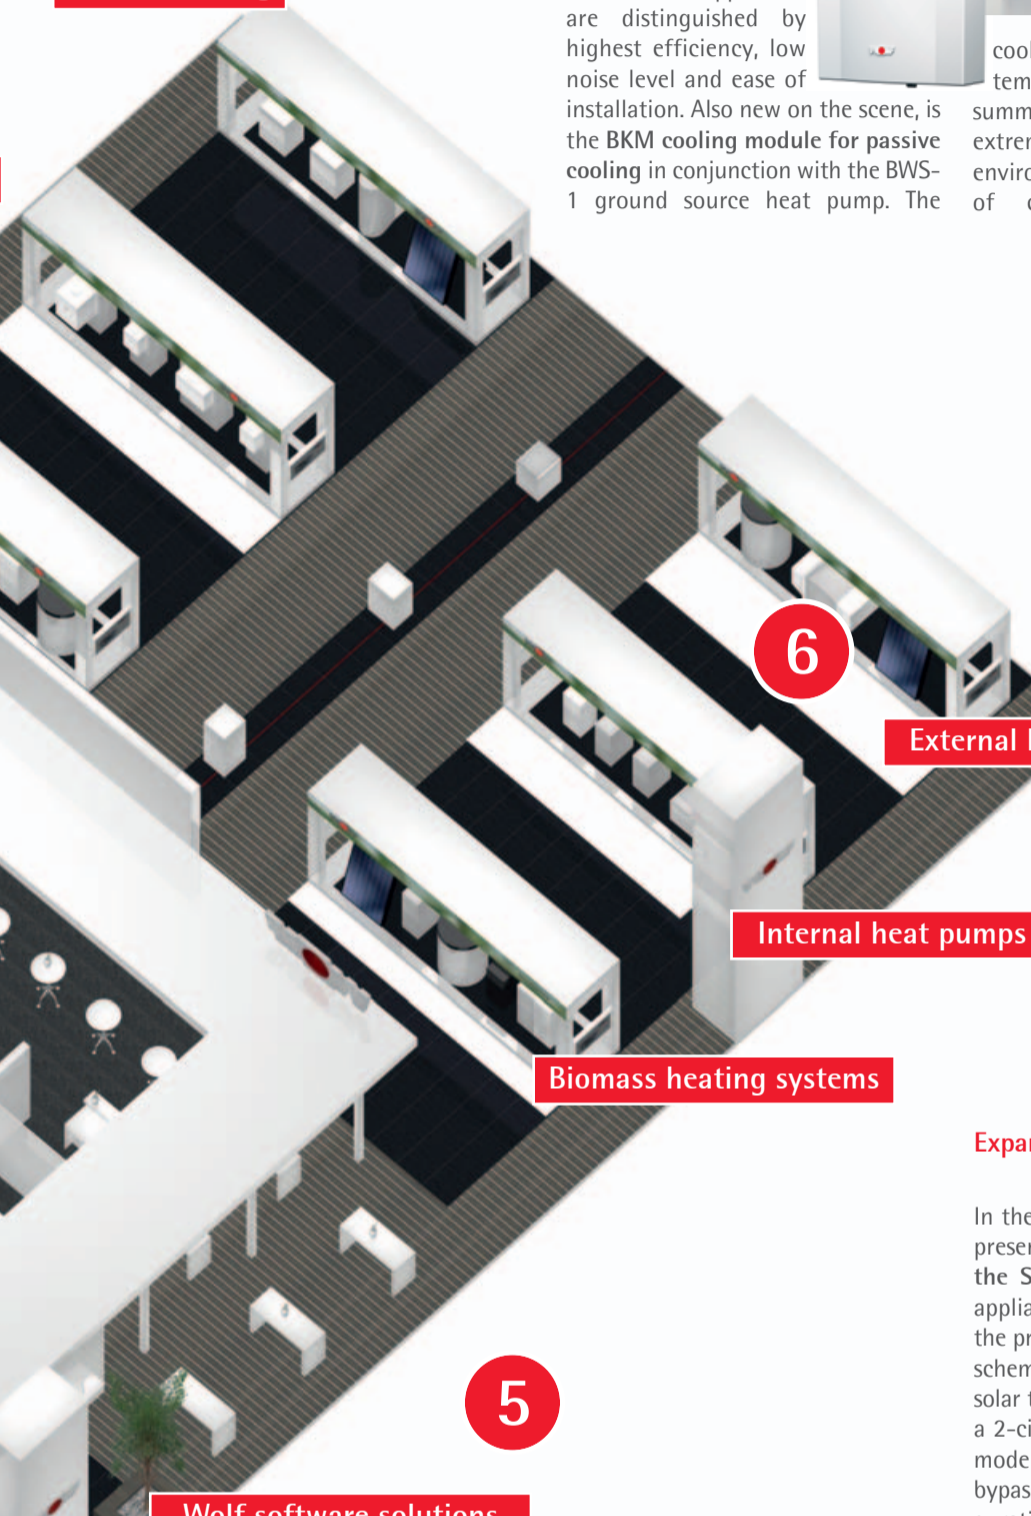

6

External heat pumps

Internal heat pumps

Biomass heating systems

5

Wolf software solutions

5

"Wolf Showroom" app and Wolf heat pump simulation

All products, all advantages, all data at a glance, the Wolf Showroom combines the entire Wolf product catalogue and sales argument cards in an iPhone app! By clicking on the "Wolf solar heating" key, users can, for example, access a sample bill for renovating a house with Wolf system components. Valuable data such as renovation costs (excluding labour), possible savings on fuels, payback period and also, where possible for this combination, data for Bafa subsidies are available. Test it LIVE on 12 large touch screens on our stand. For perfect engineering and the optimisation of heat pump systems,



Wolf now provides its trade partners with an in-house design and simulation software for heat pumps.

WRS-K touch control system

In control technology, Wolf presents the WRS-K air handling control unit with touch screen in 2011. Its graphic system display of current operating data and a 7" colour TFT display with backlit LED makes using this appliance easy and intuitive. The WRS-K also includes a help assistant and can display trend curves (sensor values and switching states). The USB interface module for connecting a PC to the Wolf WRS control system is another new development. The interface module can be used to



7

program parameters and switching states by PC, transferring saved parameter records, as well as recording temperature curves and switching states by datalogger.

Other new products:

Cylinders



The new SLS solar heating module for external heating of a buffer cylinder is available as SLS-25 (24kW and up to 20 x F3-1 collectors) and SLS-50 (52kW and up to 40 x F3-1 collectors). The solar heating module features a 3-way valve for energy-optimised stratification inside the buffer cylinder, a heat meter and a taco setter to regulate the flow rate. The FWS freshwater module is used for hydraulic DHW heating and permits output matching with variable speed pumps. The fully thermally insulated appliances with integrated DHW

circulation are pre-assembled and programmed, and are available with a plate heat exchanger output between 140 and 540kW. The new SPU-2 buffer cylinder is used for central heating backup and features 100 mm soft foam insulation. The smallest SPU-2 has a 2000-litre capacity, the largest 5000-litre. There is a new primary store system, too, consisting of the LS 140 primary store module up to 315kW and the SEL-500 DHW cylinder with up to 1000-litre capacity.


Expansion of SM2 solar control unit

In the area of solar controllers, Wolf presents a functional expansion of the SM2 controller. In future, this appliance will include 14 instead of the previous 11 preconfigured system schemes. The new schemes include a solar thermal system with 3 cylinders, a 2-circuit system with stratification mode and a 2-circuit system with bypass operation. For all configurations in future, the appliance will

also include a facility to capture the amount of heat with an external heat meter and a function check for flow rate and gravity brake. The new BM solar graphic programming module offers a backlit graphic display, plain text users prompts and a graphic indication of system schemes, temperature curves and solar yields.



Visit our new exhibition stand in Hall 11 "Aircontec" air conditioning/air handling systems of the future

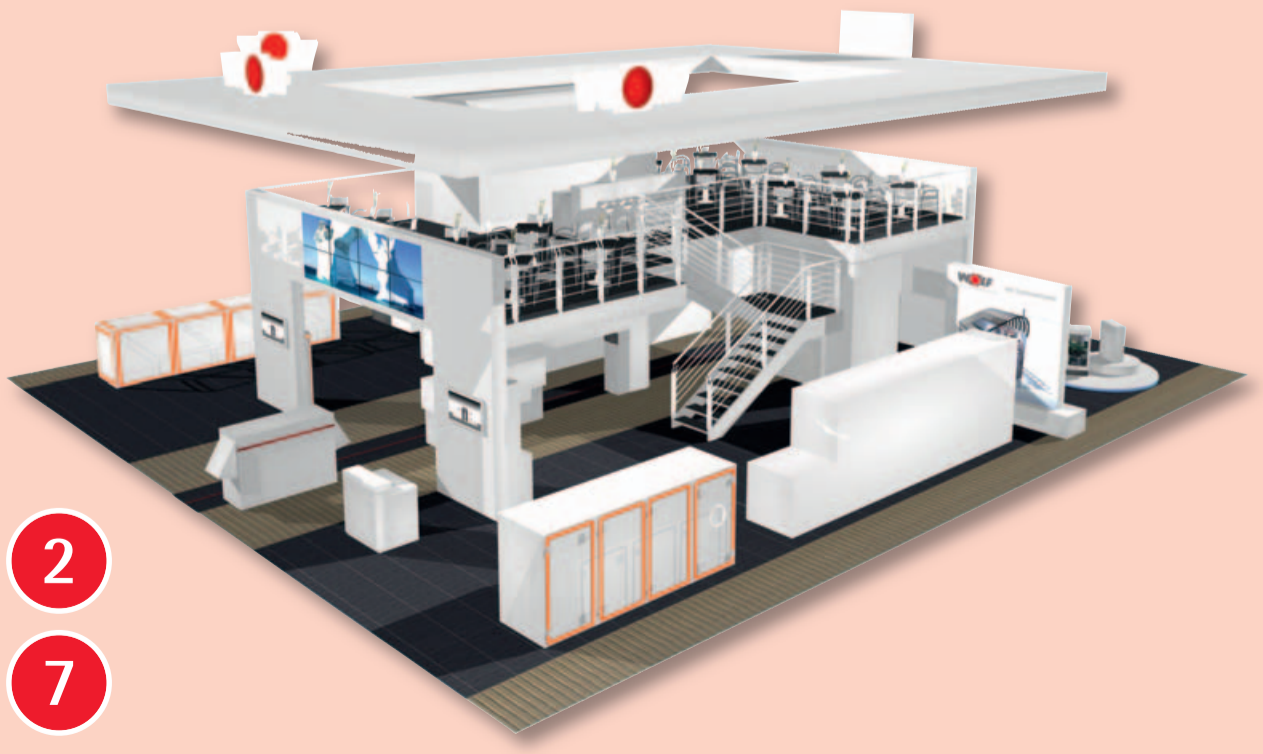

2

7

New output ranges in 2011

WOLF extends its heat pumps series

Last year, for the first time, Wolf presented its own heat pump series designed and made by Wolf. With a COP (coefficient of performance) of up to 4.7, Wolf essentially launched a new efficiency class right from the start. The new series was initially offered with 11 different versions for internal and external installation, as standard or compact appliances, and as a heating centre with integral DHW cylinder. Now, Wolf is expanding this series.

In future, BWS-1 ground source heat pumps will be offered with output between 6 and 16kW, and BWL-1 air source heat pumps with output from 8 – 14kW. The air source heat pumps for internal or external installation and the ground source heat pumps are suitable for heating flow temperatures up to 63°C.

The new high-efficiency Wolf heat pumps make their mark particularly when it comes to efficiency. A fact emphasised by their COPs, which indicate the energetic performance of the appliance. Compared to most competitors, specifically heat pump specialists, the benefits of Wolf as a system supplier are clearly evident. Only perfectly matched individual components ensure a coherent overall concept. Just what you can expect from Wolf: The new high efficiency heat pumps achieve a COP of up to 4.7 (ground source) with B0/W35 to EN 14511 or 3.8 (air



source) with A2/W35 to EN 14511, putting them ahead of the field, straight away.

However, this convincing energy efficiency is, by far, not the only sales argument that speaks in favour of HE pumps from Wolf. All appliances operate extremely

quietly and are fitted with Wolf WRS controllers as standard. Wolf also sets a new standard when it comes to user friendliness, thanks to the innovative heat pump manager, a control unit into which, for example, Wolf solar components can also be linked. It could hardly be easier. This applies

to siting too, as all appliances, even ground source heat pumps, can be sited and installed anywhere because of their extremely slender dimensions and the fact that their

The Wolf heat pump system is optimally enhanced with the new BKM cooling module for passive cooling in conjunction with the BWS-1 ground source heat pump. The cooling module uses the low temperatures of the ground in summer and so is an extremely cost-effective and environmentally responsible method for cooling without the use of compressors. The large heat exchanger surface of the appliance guarantees high transfer rates. The heat pump is controlled by the heat pump manager.

"Wolf can draw on over 40 years of experience in the air handling sector, so the necessary competence and know-how is right at hand. It is therefore a logical step to move into the future-oriented market for heat pumps," explains Bernhard Steppe, Sales Manager at Wolf GmbH. "We have a very good reputation amongst design and engineering consultants, and system builders too, and we hope this good reputation will transfer quickly to our heat pumps and support this new venture".

Fits like a glove

Proprietary Wolf sizing program for heat pumps



For perfect engineering and the optimisation of heat pump systems, Wolf provides its trade partners with its in-house design and simulation software for heat pumps with immediate effect.

This newly developed software makes it possible to determine the heat demand using building data,

and information regarding building use and climatic conditions. The optimum system configuration can be determined on the basis of site-specific conditions, the sizing of air source and ground source heat pumps in accordance with the climatic conditions and the sizing of geothermal probes and collectors for geothermal heat pumps in line with the ground conditions. The Wolf sizing program will, in future, be available for download from the Wolf homepage, similar to the tried and tested Wolf solar sizing program currently available on our website.

Always one step ahead:

High effectiveness of Wolf CSZ gas condensing solar centre

A larger cylinder capacity pays off. This is the conclusion reached by a test comparing the Wolf gas condensing solar centre with 310 litre cylinder capacity with competing systems with a 160 litre cylinder capacity.

The Wolf CSZ was more effective than competing systems in three areas: Energy from the solar thermal system for DHW heating, coverage of DHW heating and CO₂ emissions prevented. In all three sub-areas, the Wolf 310 gas condensing solar centre beat the competition. This applies both to DHW consumption of around 100 litres per day (2-person household) and a 4-person household with DHW consumption of around 200 litres per day. Therefore, for DHW heating

with the Wolf CSZ around 1427 kW/h (daily consumption 100 l) or 1757 kW/h (daily consumption 200 l) are available. For competing systems with a 160 litre cylinder capacity, these figures are 1148 kW/h and 1429 kW/h respectively. This indicates an output that is some 24 percent higher from the Wolf CSZ. The story is similar when it comes to covering the DHW heating demand. Here, the Wolf system has peak values of 72% (100 l) or 53% (200 l daily consumption). This indicates up to 9% higher coverage than competitors, which reach 63% and 44% respectively. The lead in relation to CO₂ emissions is also significant. The Wolf system achieves savings of up to 24%. Expressed in figures, this means



that 357 kg of CO₂ emissions are prevented with a daily consumption of 100 litres or 440 kg with a daily consumption of 200 litres.



Production

Publisher:
Wolf GmbH
Postfach 1380
D-84048 Mainburg

Editorial office:
Marketing Communication
Tel. +49(0) 87 51 74-0
Fax +49(0) 87 51 74-16 83

All data has been produced according to current information. It is non-binding. Text and photos may only be reproduced with the approval of the publisher.
E-Mail: Info@wolf-heiztechnik.de,
Internet: www.wolf-heiztechnik.de